

## LED

### DOWN LIGHT

The multitude of options in terms of appearance, ring and shape of fitment (with and without tile) enable you to find the perfect solution. Our Downlight range can accommodate even the most rigid requirements. LED Downlights are an excellent alternative to traditional items.





- Colour Rendering: 80+
- Cut Out:  $\Phi 140\text{mm}$
- Accessories N/A
- Technical

### 4935A

#### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 30W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 85lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi 167 \times 99\text{mm}$  |
| IP Class      | 65                             |



- Colour Rendering: 80+
- Cut Out:  $\Phi 165\text{mm}$
- Accessories N/A
- Technical

### 4950A

#### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 40W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 85lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi 195 \times 109\text{mm}$ |
| IP Class      | 65                             |



- Colour Rendering: 80+
- Cut Out:  $\Phi 200\text{mm}$
- Accessories N/A
- Technical

### 4960A

#### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 60W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 85lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi 230 \times 128\text{mm}$ |
| IP Class      | 65                             |



LED<sub>COB</sub>  
DOWN LIGHT

P01



- Colour Rendering: 80+
- Cut Out:  $\Phi 140\text{mm}$
- Accessories N/A
- Technical

### 4935B

#### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 30W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 85lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi 167 \times 99\text{mm}$  |
| IP Class      | 65                             |



- Colour Rendering: 80+
- Cut Out:  $\Phi 165\text{mm}$
- Accessories N/A
- Technical

### 4950B

#### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 40W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 85lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi 195 \times 109\text{mm}$ |
| IP Class      | 65                             |



- Colour Rendering: 80+
- Cut Out:  $\Phi 200\text{mm}$
- Accessories N/A
- Technical

### 4960B

#### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 60W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 85lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi 230 \times 128\text{mm}$ |
| IP Class      | 65                             |



P02



- Colour Rendering: 80+
- Cut Out:  $\Phi 70\text{mm}$
- Accessories N/A
- Technical

9204

GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 8W                             |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 80lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi 85 \times 45\text{mm}$   |
| IP Class      | 40                             |



LED<sub>SMD</sub>  
DOWN LIGHT

P03



- Colour Rendering: 80+
- Cut Out:  $\Phi 90\text{mm}$
- Accessories N/A
- Technical

9404

GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 12W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 80lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi 110 \times 40\text{mm}$  |
| IP Class      | 40                             |



- Colour Rendering: 80+
- Cut Out:  $\Phi 160\text{mm}$
- Accessories N/A
- Technical

N4052

GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 24W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 80lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi 190 \times 46\text{mm}$  |
| IP Class      | 40                             |



- Colour Rendering: 80+
- Cut Out:  $\Phi 200\text{mm}$
- Accessories N/A
- Technical

N4053

GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 30W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 80lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi 228 \times 46\text{mm}$  |
| IP Class      | 40                             |



Recessed Downlight


P04


# Lotus

series

## Key features

- More elegant and better effect for heat dissipating
- Unique detachable structure
- High lumen LED COB light source is adopted
- CRI>80 reveals the quality of light

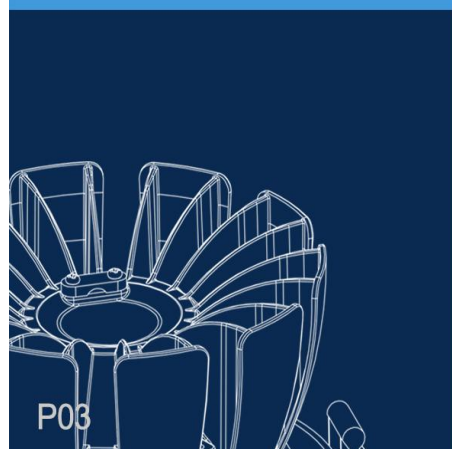

|                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p><b>Heat Sink</b></p> <p><math>T_c &lt; 60^\circ\text{C}</math></p> <p>Special housing construction serves as a cooling system is designed to dissipate heat from LED also providing maximum air flow and minimum heat resistance from the entire operation caused by rising hot air.</p> |  <p><b>Material</b></p> <p>ADC12 aluminium</p> <p>Eco-friendly top class aluminium for surface trim and heat sink with higher grade for heat dissipating and enhance the adhesion when powder coating</p> |  <p><b>Reflector</b></p> <p>efficiency 95%+</p> <p>The ball-facet reflectors are ideal to focus the brilliant light of LED. Special treatment of top class vacuum plating creates a uniform light than other standard multi facets.</p> |  <p><b>Structure</b></p> <p>Clip-on System</p> <p>The detachable structure which is making maintenance more flexible and easier. This clip-on system can save labour cost meanwhile enhance working efficiency mostly.</p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



INDOOR / RECESSED LED DOWNLIGHT



 Colour Rendering: 80+

 Cut Out: Ø90mm

 Accessories N/A

 Technical 



N9008

GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 10W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-70lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø100*80mm                      |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



 Colour Rendering: 80+

 Cut Out: Ø100mm

 Accessories N/A

 Technical 



N9002

GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 15W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-70lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø115*88mm                      |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

LED<sub>COB</sub>  
DOWN LIGHT

P05

INDOOR / RECESSED LED DOWNLIGHT



 Colour Rendering: 80+

 Cut Out: Ø145mm

 Accessories N/A

 Technical 



N4021

GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 20W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø160*103mm                     |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



Recessed Downlight

 Colour Rendering: 80+

 Cut Out: Ø180mm

 Accessories N/A

 Technical 



N4017

GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 30W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø195*112mm                     |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

P06



INDOOR / RECESSED LED DOWNLIGHT



 Colour Rendering: 80+

 Cut Out: Ø215mm

 Accessories N/A

 Technical 



## N4022

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 40W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø230*118mm                     |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

# LED<sup>COB</sup> DOWN LIGHT





INDOOR / RECESSED LED DOWNLIGHT



**CRI** Colour Rendering: 80+

**Cut Out:** Ø100mm

**Accessories** N/A

**Technical**



## N9003

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 15W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-70lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | 115*115*79mm                   |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

**CRI** Colour Rendering: 80+

**Cut Out:** Ø150mm

**Accessories** N/A

**Technical**



## N4020

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 20W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-70lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | 165*165*90.5mm                 |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

# LED<sub>COB</sub>

## DOWN LIGHT

P09

INDOOR / RECESSED LED DOWNLIGHT



Recessed Downlight

**CRI** Colour Rendering: 80+

**Cut Out:** Ø180mm

**Accessories** N/A

**Technical**



## N4032

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 30W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | 195*195*97mm                   |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

**CRI** Colour Rendering: 80+

**Cut Out:** Ø215mm

**Accessories** N/A

**Technical**



## N4027

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 40W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | 230**230*103mm                 |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

P10



INDOOR / RECESSED LED DOWNLIGHT



 Colour Rendering: 80+

 Cut Out: Ø215mm

 Accessories N/A

 Technical 



## N4033

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 40W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | 230*230*118mm                  |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

# LED<sup>COB</sup> DOWN LIGHT





CRI Colour Rendering: 80+

Cut Out: Ø100mm

Accessories N/A

Technical



## N9004

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 15W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-70lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø115*79mm                      |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

CRI Colour Rendering: 80+

Cut Out: Ø150mm

Accessories N/A

Technical



## N4015

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 20W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-70lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø165*90.5mm                    |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



Recessed Downlight

CRI Colour Rendering: 80+

Cut Out: Ø180mm

Accessories N/A

Technical



## N4031

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 30W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø195*97mm                      |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

CRI Colour Rendering: 80+

Cut Out: Ø215mm

Accessories N/A

Technical



## N4025

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 40W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø230*103mm                     |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

# LED<sub>COB</sub> DOWN LIGHT



- Colour Rendering: 80+
- Cut Out: Ø90mm
- Accessories N/A
- Technical



## N9009

## GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 10W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-70lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | 100*100*80mm                   |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



- Colour Rendering: 80+
- Cut Out: Ø100mm
- Accessories N/A
- Technical



## N9001

## GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 15W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-70lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | 115*115*88mm                   |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



- Colour Rendering: 80+
- Cut Out: Ø145mm
- Accessories N/A
- Technical



## N4029

## GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 20W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | 160*160*103mm                  |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



Recessed Downlight

- Colour Rendering: 80+
- Cut Out: Ø180mm
- Accessories N/A
- Technical



## N4030

## GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 30W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White+Black                    |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | 195*195*112mm                  |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

# LED<sub>COB</sub>


## DOWN LIGHT


# Blade

series

## Key features

- Special blade shape heat sink provides the utmost heat dissipation.
- Unique detachable structure.
- High lumen LED COB light source with CRI>80 reveals the quality of light

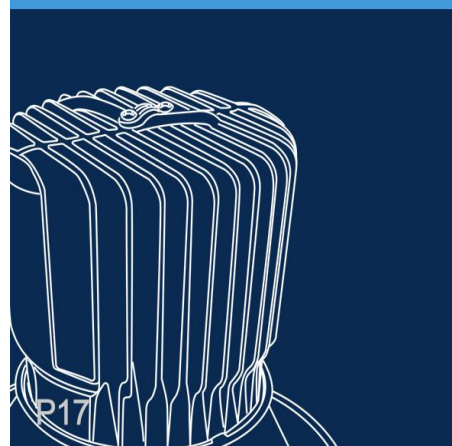

| Heat Sink                                                                                                                                                                                             | Material                                                                                                                                                   | Reflector                                                                                                                                                                               | Structure                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p><math>T_c &lt; 60^{\circ}\text{C}</math></p>                                                                   |  <p>ADC12 aluminium</p>                                               |  <p>efficiency 95%+</p>                                                                            |  <p>Standard heat sink with screw free system</p>                                                                        |
| <p>The blade design housing serves as a cooling system to dissipate heat from LED also providing maximum air flow and minimum heat resistance from the entire operation caused by rising hot air.</p> | <p>Eco-friendly top class aluminium for surface trim and heat sink with higher grade for heat dissipating and enhance the adhesion when powder coating</p> | <p>The ball-facet reflectors are ideal to focus the brilliant light of LED. Special treatment of top class vacuum plating creates a uniform light than other standard multi facets.</p> | <p>The detachable structure with screw free installation which is making maintenance more flexible and easier. The standard heat sink as an interchangeable part can be shared by various kinds of trims.</p> |

P18



**CRI** Colour Rendering: 80+

**Cut Out:** Ø90mm

**Accessories** N/A

**Technical**



## 4070A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 15W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-75lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø103*86mm                      |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

**CRI** Colour Rendering: 80+

**Cut Out:** Ø135mm

**Accessories** N/A

**Technical**



## 4072A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 20W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø150*102mm                     |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



**CRI** Colour Rendering: 80+

**Cut Out:** Ø155mm

**Accessories** N/A

**Technical**



## 4074A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 30W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø175*130mm                     |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

Recessed Downlight

# LED<sub>COB</sub> DOWN LIGHT





INDOOR / RECESSED LED DOWNLIGHT



-  Colour Rendering: 80+  
 Cut Out: Ø115mm  
 Accessories N/A  
 Technical 



4071A

GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 15W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-75lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø130*122mm                     |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

-  Colour Rendering: 80+  
 Cut Out: Ø170mm  
 Accessories N/A  
 Technical 



4073A

GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 20W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø190*160mm                     |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



-  Colour Rendering: 80+  
 Cut Out: Ø200mm  
 Accessories N/A  
 Technical 



4075A

GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 30W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø220*189mm                     |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

Recessed Downlight

LED<sub>COB</sub>  
DOWN LIGHT



P21

P22



 Colour Rendering: 80+

 Cut Out: Ø105\*105mm

 Accessories N/A

 Technical 



## N1009-1A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 15W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-75lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø116*116*84mm                  |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



 Colour Rendering: 80+

 Cut Out: Ø200\*105mm

 Accessories N/A

 Technical 



## N1009-2A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 2*15W                          |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-75lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø213.6*116*84mm                |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



 Colour Rendering: 80+

 Cut Out: Ø290\*105mm

 Accessories N/A

 Technical 



## N1009-3A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 3*15W                          |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 65-75lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø307.4*116*84mm                |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

# LED<sub>COB</sub>

## DOWN LIGHT



-  Colour Rendering: 80+
-  Cut Out: Ø140\*140mm
-  Accessories N/A
-  Technical 



## N1010-1A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 20W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø160*160*120mm                 |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



-  Colour Rendering: 80+
-  Cut Out: Ø270\*140mm
-  Accessories N/A
-  Technical 



## N1010-2A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 2*20W                          |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø290*160*120mm                 |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

# LED<sub>COB</sub>

## DOWN LIGHT



-  Colour Rendering: 80+
-  Cut Out: Ø400\*140mm
-  Accessories N/A
-  Technical 



## N1010-3A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 3*20W                          |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø420*160*120mm                 |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



**CRI** Colour Rendering: 80+

**Cut Out:** Ø160\*160mm

**Accessories** N/A

**Technical**



## N1011-1A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 30W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø176*176*134mm                 |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



**CRI** Colour Rendering: 80+

**Cut Out:** Ø310\*160mm

**Accessories** N/A

**Technical**



## N1011-2A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 2*30W                          |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø325*176*134mm                 |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar



**CRI** Colour Rendering: 80+

**Cut Out:** Ø460\*160mm

**Accessories** N/A

**Technical**



## N1011-3A

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 3*30W                          |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75-80lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø474*176*134mm                 |
| IP Class      | 40                             |

\* 2700K/6000K for Epistar

# LED<sub>COB</sub> DOWN LIGHT




# Storm

series

## Key features

- Simple and compact design.
- Full body heat sink provides the utmost heat dissipation.
- Reflector adopted with oxidized treatment and innovative anti-glare technology

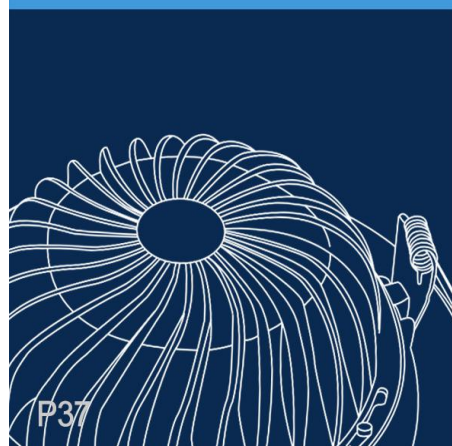

| Heat Sink                                                                                                                            | Material                                                                                                                                   | Reflector                                                                                                                                                                               | Structure                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
|  <p><math>T_c &lt; 65^{\circ}\text{C}</math></p> |  <p>ADC12 aluminium</p>                               |  <p>efficiency 90%+</p>                                                                            |  <p>Screw free</p>                          |
| <p>Full body serves as a cooling system which is designed to dissipate most of heat from LED module.</p>                             | <p>Eco-friendly top class aluminium for complete with higher grade for heat dissipating and enhance the adhesion during powder coating</p> | <p>The ball-facet reflectors are ideal to focus the brilliant light of LED. Special treatment of top class vacuum plating creates a uniform light than other standard multi facets.</p> | <p>The screw free structure which is making maintenance more flexible and easier. It also enhance working efficiency mostly.</p> |

P38



INDOOR / RECESSED LED DOWNLIGHT



 Colour Rendering: 80

 Cut Out: Ø100mm

 Accessories N/A

 Technical 



N4048

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 10W                           |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 65-70lm/w                     |
| Dimmable      | N/A                           |
| Size          | Ø113*50mm                     |
| IP Class      | 40                            |

 Colour Rendering: 80

 Cut Out: Ø145mm

 Accessories N/A

 Technical 



N4049

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 15W                           |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 65-70lm/w                     |
| Dimmable      | N/A                           |
| Size          | Ø160*53mm                     |
| IP Class      | 40                            |



Recessed Downlight

 Colour Rendering: 80

 Cut Out: Ø160mm

 Accessories N/A

 Technical 



N4050

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 20W                           |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 75-80lm/w                     |
| Dimmable      | N/A                           |
| Size          | Ø185*56mm                     |
| IP Class      | 40                            |

 Colour Rendering: 80

 Cut Out: Ø200mm

 Accessories N/A

 Technical 



N4051

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 30W                           |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 75-80lm/w                     |
| Dimmable      | N/A                           |
| Size          | Ø220*63mm                     |
| IP Class      | 40                            |

LED<sub>COB</sub>  
DOWN LIGHT

P39

P40

# Flame

series


Dimmable &  
Colour changeable

## Key features

- Dimmable & Colour Changeable
- One step forming design with simple and soft curves
- Acrylic frame with decorative light



Dimmable  
Version

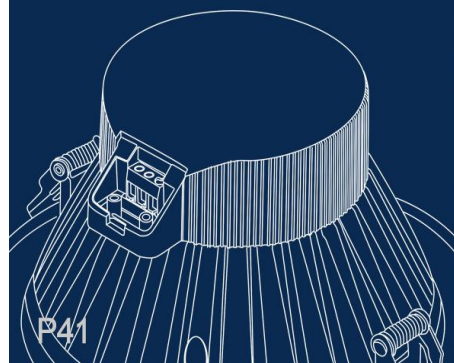

P41



Heat Sink

$T_c < 55^{\circ}\text{C}$

One-step forming housing with simple and soft curves serves as a cooling system which is designed to dissipate most of heat from LED module.



Material

ADC12 aluminium  
+  
Top class acrylic

Eco-friendly aluminium for complete housing with higher grade for heat dissipating. Plus the decorative acrylic which makes the design more elegant.



Function

Smart control

COLOR TEMPERATURE  
CHANGEABLE

SMOOTH  
DIMMABLE

With a smart driver, it could be controlled by a remote within the distance of 20M. It can be easily dimmed also the CCT can be adjusted in the range of 2700-6000K.



Structure

Precisely  
calculated angle

With the precisely calculated angle of the housing combined with high quality reflection paper, the light is reflected according to the required effects on the top diffuser as well as the round trim.

P42



CRI Colour Rendering: 70+

Cut Out: Ø85mm

Accessories N/A

Technical SMD



## DL-4043C-DIM

## GENERAL INFORMATION

|               |                       |
|---------------|-----------------------|
| Power         | 7W                    |
| CCT           | 2700K-6000K           |
| Input         | AC220-240V 50/60Hz    |
| Body colour   | White                 |
| Main material | Die-casting Aluminium |
| Luminous flux | 60-75lm/w             |
| Dimmable      | 2.4G wireless         |
| Size          | Ø98*76mm              |
| IP Class      | 40                    |

CRI Colour Rendering: 70+

Cut Out: Ø100mm

Accessories N/A

Technical SMD



## DL-4044C-DIM

## GENERAL INFORMATION

|               |                       |
|---------------|-----------------------|
| Power         | 10W                   |
| CCT           | 2700K-6000K           |
| Input         | AC220-240V 50/60Hz    |
| Body colour   | White                 |
| Main material | Die-casting Aluminium |
| Luminous flux | 60-75lm/w             |
| Dimmable      | 2.4G wireless         |
| Size          | Ø120*85mm             |
| IP Class      | 40                    |

# LED<sup>SMD</sup>

## DOWN LIGHT



Recessed Downlight

CRI Colour Rendering: 70+

Cut Out: Ø145mm

Accessories N/A

Technical SMD



## DL-4045C-DIM

## GENERAL INFORMATION

|               |                       |
|---------------|-----------------------|
| Power         | 15W                   |
| CCT           | 2700K-6000K           |
| Input         | AC220-240V 50/60Hz    |
| Body colour   | White                 |
| Main material | Die-casting Aluminium |
| Luminous flux | 60-75lm/w             |
| Dimmable      | 2.4G wireless         |
| Size          | Ø160*98mm             |
| IP Class      | 40                    |

CRI Colour Rendering: 70+

Cut Out: Ø160mm

Accessories N/A

Technical SMD



## DL-4046C-DIM

## GENERAL INFORMATION

|               |                       |
|---------------|-----------------------|
| Power         | 20W                   |
| CCT           | 2700K-6000K           |
| Input         | AC220-240V 50/60Hz    |
| Body colour   | White                 |
| Main material | Die-casting Aluminium |
| Luminous flux | 60-75lm/w             |
| Dimmable      | 2.4G wireless         |
| Size          | Ø184*99mm             |
| IP Class      | 40                    |



INDOOR / RECESSED LED DOWNLIGHT



 Colour Rendering: 70+

 Cut Out: Ø205mm

 Accessories N/A

 Technical 




## DL-4047C-DIM

### GENERAL INFORMATION

|               |                       |
|---------------|-----------------------|
| Power         | 30W                   |
| CCT           | 2700K-6000K           |
| Input         | AC220-240V 50/60Hz    |
| Body colour   | White                 |
| Main material | Die-casting Aluminium |
| Luminous flux | 60-75lm/w             |
| Dimmable      | 2.4G wireless         |
| Size          | Ø225*100mm            |
| IP Class      | 40                    |

P45

# LED<sup>SMD</sup> DOWN LIGHT

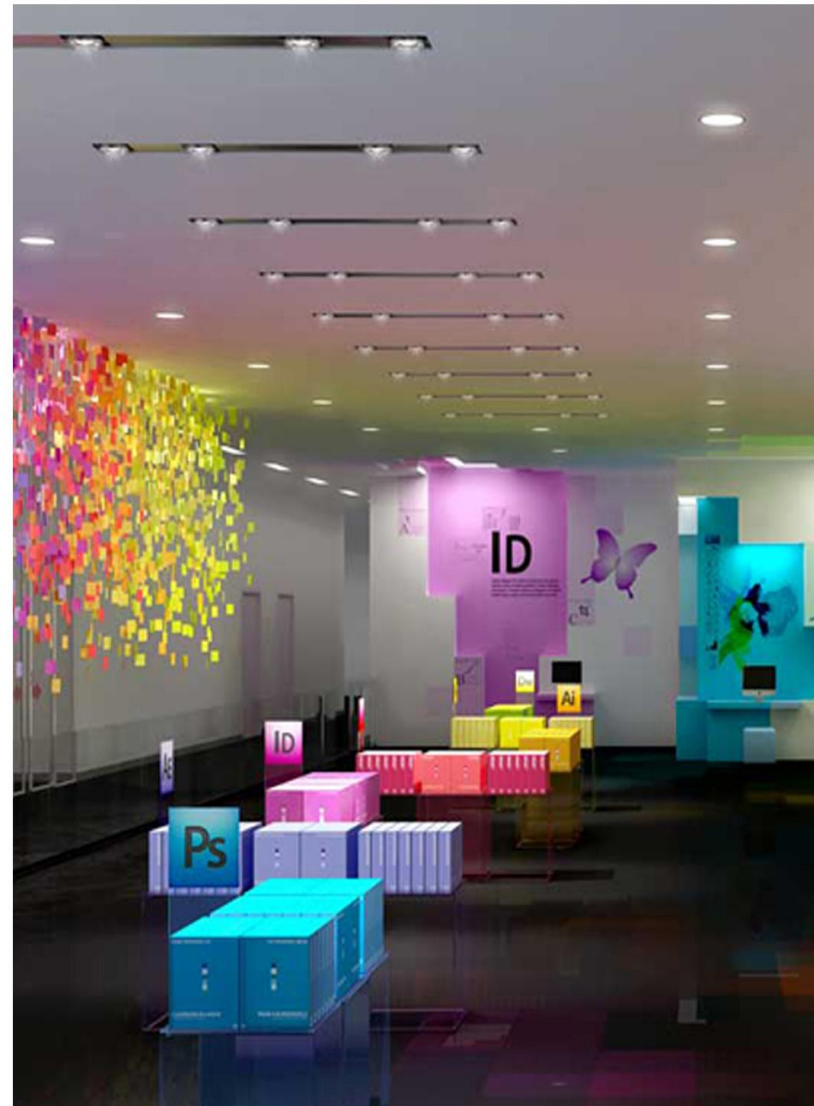

P46

With  
**Night Light**  
function

Flame  
series

## Key features

- Colour Changeable
- One step forming design with simple and soft curves
- Acrylic ring with decorative light

Switch Colour



Heat Sink

$T_c < 55^{\circ}\text{C}$

One-step forming housing with simple and soft curves serves as a cooling system which is designed to dissipate most of heat from LED module.



Material

ADC12 aluminium  
+  
Top class acrylic


Eco-friendly aluminium for complete housing with higher grade for heat dissipating. Plus the decorative acrylic which makes the design more elegant.



Function

Switch control

With a smart driver, it easily switched from main to night light.




Structure

Precisely  
calculated angle

With the precisely calculated angle of the housing combined with high quality reflection paper, the light is reflected according to the required effects on the top diffuser as well as the round trim.

P48

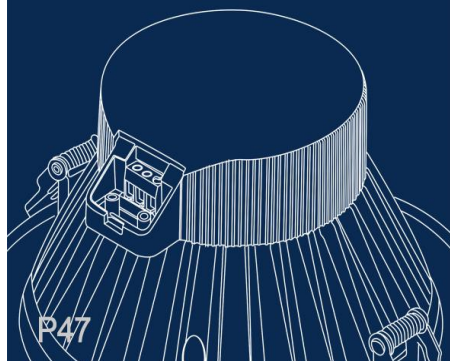

P47



 Colour Rendering: 70+

 Cut Out: Ø85mm

 Accessories N/A

 Technical 



### DL-4043B-NL

#### GENERAL INFORMATION

|               |                       |
|---------------|-----------------------|
| Power         | 6+1W                  |
| CCT           | 2700K/4000K/6000K     |
| Input         | AC220-240V 50/60Hz    |
| Body colour   | White                 |
| Main material | Die-casting Aluminium |
| Luminous flux | 60-75lm/w             |
| Dimmable      | N/A                   |
| Size          | Ø95*73mm              |
| IP Class      | 40                    |

 Colour Rendering: 70+

 Cut Out: Ø100mm

 Accessories N/A

 Technical 



### DL-4044B-NL

#### GENERAL INFORMATION

|               |                       |
|---------------|-----------------------|
| Power         | 10+1.5W               |
| CCT           | 2700K/4000K/6000K     |
| Input         | AC220-240V 50/60Hz    |
| Body colour   | White                 |
| Main material | Die-casting Aluminium |
| Luminous flux | 60-75lm/w             |
| Dimmable      | N/A                   |
| Size          | Ø116*83mm             |
| IP Class      | 40                    |



Recessed Downlight

 Colour Rendering: 70+

 Cut Out: Ø145mm

 Accessories N/A

 Technical 



### DL-4045B-NL

#### GENERAL INFORMATION

|               |                       |
|---------------|-----------------------|
| Power         | 14+2W                 |
| CCT           | 2700K/4000K/6000K     |
| Input         | AC220-240V 50/60Hz    |
| Body colour   | White                 |
| Main material | Die-casting Aluminium |
| Luminous flux | 60-75lm/w             |
| Dimmable      | N/A                   |
| Size          | Ø156*96mm             |
| IP Class      | 40                    |

 Colour Rendering: 70+

 Cut Out: Ø160mm

 Accessories N/A

 Technical 



### DL-4046B-NL

#### GENERAL INFORMATION

|               |                       |
|---------------|-----------------------|
| Power         | 18+2.5W               |
| CCT           | 2700K/4000K/6000K     |
| Input         | AC220-240V 50/60Hz    |
| Body colour   | White                 |
| Main material | Die-casting Aluminium |
| Luminous flux | 60-75lm/w             |
| Dimmable      | N/A                   |
| Size          | Ø180*97mm             |
| IP Class      | 40                    |

# LED<sup>SMD</sup> DOWN LIGHT



INDOOR / RECESSED LED DOWNLIGHT



 Colour Rendering: 70+

 Cut Out: Ø205mm

 Accessories N/A

 Technical 



DL-4047B-NL

#### GENERAL INFORMATION

|               |                       |
|---------------|-----------------------|
| Power         | 28+3W                 |
| CCT           | 2700K/4000K/6000K     |
| Input         | AC220-240V 50/60Hz    |
| Body colour   | White                 |
| Main material | Die-casting Aluminium |
| Luminous flux | 60-75lm/w             |
| Dimmable      | N/A                   |
| Size          | Ø220*98mm             |
| IP Class      | 40                    |

LED<sub>COB</sub>  
DOWN LIGHT

P51

LED<sub>SMD</sub>  
DOWN LIGHT



P52


*match whatever you need*


# Flow

series

## Key features

- Slice shape heat sink provides the utmost heat dissipation
- Unique detachable structure.
- High lumen LED COB light source with CRI>80 reveals the quality of light

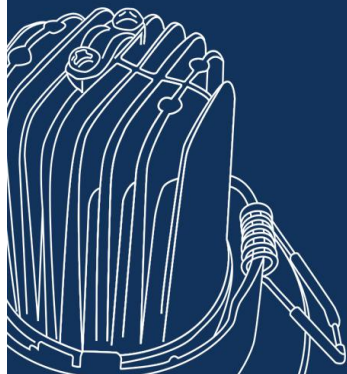

|                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p><b>Heat Sink</b></p> <p><math>T_c &lt; 65^{\circ}\text{C}</math></p> <p>Sliced heat sink provides maximum air flow and minimum heat resistance from the entire operation caused by rising hot air.</p> |  <p><b>Material</b></p> <p>ADC12 aluminium</p> <p>Eco-friendly top class aluminium for complete with higher grade for heat dissipating and enhance the adhesion during powder coating.</p> |  <p><b>Reflector</b></p> <p>92%+ efficiency</p> <p>The ball-facet reflectors are ideal to focus the brilliant light of LED. Special treatment of top class vacuum plating creates a uniform light than other standard multi facets.</p> |  <p><b>Structure</b></p> <p>Screw free system</p> <p>The detachable structure with screw free installation which is making maintenance more flexible and easier. The standard heat sink as an interchangeable part can be shared by various kinds of trims.</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



INDOOR / RECESSED COB SPOTLIGHT



Colour Rendering: 80+

Cut Out: Ø70mm

Accessories N/A

Technical



9066

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 5W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Plastic                       |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø85*56.5mm                    |
| IP Class      | 40                            |

Colour Rendering: 80+

Cut Out: Ø85mm

Accessories N/A

Technical



9067

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Plastic                       |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø100*56.5mm                   |
| IP Class      | 40                            |

LED<sub>COB</sub>  
SPOT LIGHT

P61

INDOOR / RECESSED COB SPOTLIGHT



Recessed Spotlight

Colour Rendering: 80+

Cut Out: Ø70mm

Accessories N/A

Technical



9096

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 5W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø85*56.5mm                    |
| IP Class      | 40                            |

Colour Rendering: 80+

Cut Out: Ø70mm

Accessories N/A

Technical



9092

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 5W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White+Black                   |
| Main material | Die-casting Aluminium         |
| Luminous flux | 80lm/w                        |
| Dimmable      | triac/1-10v optional          |
| Size          | 85*85*56.5mm                  |
| IP Class      | 40                            |

P62



INDOOR / RECESSED COB SPOTLIGHT



Colour Rendering: 80+

Cut Out: Ø60mm

Accessories N/A

Technical



9068

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 5W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø75*59mm                      |
| IP Class      | 40                            |

Colour Rendering: 80+

Cut Out: Ø75mm

Accessories N/A

Technical



9077

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø85*59mm                      |
| IP Class      | 40                            |

LED<sub>COB</sub>  
SPOT LIGHT

P63

INDOOR / RECESSED COB SPOTLIGHT



Recessed Spotlight

Colour Rendering: 80+

Cut Out: Ø60mm

Accessories N/A

Technical



9080

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 5W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø75*56.5mm                    |
| IP Class      | 40                            |

Colour Rendering: 80+

Cut Out: Ø75mm

Accessories N/A

Technical



9081

GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø90*59mm                      |
| IP Class      | 40                            |

P64



INDOOR / RECESSED COB SPOTLIGHT



Colour Rendering: 80+

Cut Out: Ø75mm

Accessories N/A

Technical



9071

## GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 5W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø85*75mm                      |
| IP Class      | 40                            |

Colour Rendering: 80+

Cut Out: Ø90mm

Accessories N/A

Technical



9076

## GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø100*75mm                     |
| IP Class      | 40                            |

# LED<sub>COB</sub>

## SPOT LIGHT

P65

INDOOR / RECESSED COB SPOTLIGHT



Recessed Spotlight

Colour Rendering: 80+

Cut Out: 90\*90mm

Accessories N/A

Technical



9074

## GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | 100*100*80mm                  |
| IP Class      | 40                            |

Colour Rendering: 80+

Cut Out: Ø90mm

Accessories N/A

Technical



9073

## GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø100*80mm                     |
| IP Class      | 40                            |

P66



INDOOR / RECESSED COB SPOTLIGHT



 Colour Rendering: 80+

 Cut Out: Ø75mm

 Accessories N/A

 Technical 



9091

#### GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 5W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | 85*85*73mm                    |
| IP Class      | 40                            |

 Colour Rendering: 80+

 Cut Out: Ø85mm

 Accessories N/A

 Technical 



9083

#### GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | 98*98*73mm                    |
| IP Class      | 40                            |

LED<sub>COB</sub>  
SPOT LIGHT

P67

INDOOR / RECESSED COB SPOTLIGHT



Recessed Spotlight

 Colour Rendering: 80+

 Cut Out: Ø75mm

 Accessories N/A

 Technical 



9090

#### GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 5W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø85*73mm                      |
| IP Class      | 40                            |

 Colour Rendering: 80+

 Cut Out: Ø85mm

 Accessories N/A

 Technical 



9082

#### GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø98*73mm                      |
| IP Class      | 40                            |

P68

*spot the way you need*

# Skyline


series

## Key features

- Whirlpool shape heat sink acts as an active cooling way.
- Unique detachable structure.
- High lumen LED COB light source reveals the quality of light



P69

|                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p><b>Heat Sink</b></p> <p><math>T_c &lt; 65^{\circ}\text{C}</math></p> <p>Whirlpool shape heat sink provides maximum air flow and minimum heat resistance from the entire operation caused by rising hot air.</p> |  <p><b>Material</b></p> <p>ADC12 aluminium</p> <p>Eco-friendly top class aluminium for complete with higher grade for heat dissipating and enhance the adhesion during powder coating.</p> |  <p><b>Reflector</b></p> <p>92%+ efficiency</p> <p>The ball-facet reflectors are ideal to focus the brilliant light of LED. Special treatment of top class vacuum plating creates a uniform light than other standard multi facets.</p> |  <p><b>Structure</b></p> <p>Easy fix</p> <p>The standard heat sink as an interchangeable part can be shared by various kinds of trims.</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

P70



 Colour Rendering: 70+

 Cut Out: Ø90mm

 Accessories N/A

 Technical 



906

## GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 8W                             |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 60-75lm/w                      |
| Dimmable      | triac/1-10v optional           |
| Size          | Ø100*70mm                      |
| IP Class      | 20                             |

 Colour Rendering: 70+

 Cut Out: Ø90mm

 Accessories N/A

 Technical 



907

## GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø100*70mm                     |
| IP Class      | 20                            |

# LED<sub>COB</sub> SPOT LIGHT

P71



 Colour Rendering: 70+

 Cut Out: Ø85mm

 Accessories N/A

 Technical 



908

## GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø95*70mm                      |
| IP Class      | 40                            |

 Colour Rendering: 70+

 Cut Out: Ø85mm

 Accessories N/A

 Technical 



909

## GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | triac/1-10v optional          |
| Size          | Ø95*70mm                      |
| IP Class      | 40                            |

P72



 Colour Rendering: 70+

 Cut Out: Ø85mm

 Accessories N/A

 Technical 



910

## GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | N/A                           |
| Size          | Ø95*70mm                      |
| IP Class      | 40                            |



 Colour Rendering: 70+

 Cut Out: Ø85mm

 Accessories N/A

 Technical 



911

## GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 60-75lm/w                     |
| Dimmable      | N/A                           |
| Size          | Ø95*70mm                      |
| IP Class      | 40                            |



 Colour Rendering: 70+

 Cut Out: Ø75mm

 Accessories N/A

 Technical 



1062

## GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 6W                             |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 60-75lm/w                      |
| Dimmable      | N/A                            |
| Size          | Ø95*70mm                       |
| IP Class      | 40                             |

# LED<sub>COB</sub>

## SPOT LIGHT

P73

P74

# ouen



## LED

### REFLECTOR LAMP

You will find a wide selection of GU10,MR16,GU5.3 bases.  
All our high quality light sources comply with the requirements  
for the light quality,energy saving and the environment.



2016's **LED**  
REFLECTOR LAMP

P99

P100

# Decor<sub>series</sub>

## Key features

- Compact design with elegant curves
- One-step forming housing
- Optional in wide and narrow beam angles
- High lumen CREE chip with CRI>80  
(optional CRI>90) reveals the quality of light



| Design                                                                                                                                                                                                                                                            | Lens                                                                                                                                                                                                                                                          | Function                                                                                                                                                                                                                                                                                                                                                                                                       | Chip                                                                                                                                                                                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Elegant curves which is close to the traditional halogen lamps. One-step forming housing filled in with high quality thermal compound can maximize the heat radiating.</p> |  <p>The slim and high light transmittance lens is an ideal solution to match this compact housing. Optional degrees in standard 24° or wider angle of 36° available.</p> |  <p>Triac ° </p> <p>The compact design driver can withstand high temperature inside the housing. With IC controlled, it can be constant current security which is more stable and durable. Triac control version also available.</p> |  <p>Config with high performance COB chip of CRI&gt;82 (optional CRI&gt;90), and up to 85lm/W efficiency, it reveals the quality of light.</p> |



INDOOR / REFLECTOR LAMP



Colour Rendering: 80+

Cut Out N/A

Accessories N/A

Technical



## SP-IT6W

### GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 6W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 80-85lm/w                     |
| Dimmable      | triac                         |
| Size          | Ø50*58mm                      |
| IP Class      | 40                            |

Colour Rendering: 80+

Cut Out N/A

Accessories N/A

Technical



## SP-IT8W

### GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 80-85lm/w                     |
| Dimmable      | triac                         |
| Size          | Ø50*58mm                      |
| IP Class      | 40                            |

# MR16 LED REFLECTOR LAMP

P103

INDOOR / REFLECTOR LAMP



MR16 Reflector Lamp

Colour Rendering: 80+

Cut Out N/A

Accessories N/A

Technical



## SP-IT6W-12V

### GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 6W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 80-85lm/w                     |
| Dimmable      | N/A                           |
| Size          | Ø50*51mm                      |
| IP Class      | 40                            |

Colour Rendering: 80+

Cut Out N/A

Accessories N/A

Technical



## SP-IT8W-12V

### GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 8W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Die-casting Aluminium         |
| Luminous flux | 80-85lm/w                     |
| Dimmable      | N/A                           |
| Size          | Ø50*51mm                      |
| IP Class      | 40                            |

P104



INDOOR / REFLECTOR LAMP



**CRI** Colour Rendering: 80+

**Cut Out** N/A

**Accessories** N/A

**Technical**



## SP-PC6W-01

### GENERAL INFORMATION

|               |                               |
|---------------|-------------------------------|
| Power         | 6W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K |
| Input         | AC220-240V 50/60Hz            |
| Body colour   | White                         |
| Main material | Plastic                       |
| Luminous flux | 80-85lm/w                     |
| Dimmable      | triac                         |
| Size          | Ø50*58mm                      |
| IP Class      | 40                            |

# MR16 LED REFLECTOR LAMP





- CRI** Colour Rendering: 80+
- Cut Out:** Surface Mounted
- Accessories** N/A
- Technical**

- CRI** Colour Rendering: 80+
- Cut Out:** Surface Mounted
- Accessories** N/A
- Technical**

- CRI** Colour Rendering: 80+
- Cut Out:** Surface Mounted
- Accessories** N/A
- Technical**

## N5101

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 12W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 90lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ145*57*190mm                  |
| IP Class      | 68                             |



## N5102

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 20W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 90lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ170*67*228mm                  |
| IP Class      | 68                             |



## N5103

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 30W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 90lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ189*67*257mm                  |
| IP Class      | 68                             |



LED<sub>SMD</sub>  
FLOOD LIGHT

P05



Recessed Flood Light

- CRI** Colour Rendering: 80+
- Cut Out:** Surface Mounted
- Accessories** N/A
- Technical**

- CRI** Colour Rendering: 80+
- Cut Out:** Surface Mounted
- Accessories** N/A
- Technical**

## N5104

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 50W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 90lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ280*67*265mm                  |
| IP Class      | 68                             |



## N5105

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 100W                           |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 90lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ280*70*408mm                  |
| IP Class      | 68                             |



P06



- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

## N7001

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 100W                           |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | Golden                         |
| Main material | Die-casting Aluminium          |
| Luminous flux | 90lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ232*190mm                     |
| IP Class      | 67                             |



- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

## N7002

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 150W                           |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 90lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ272*190mm                     |
| IP Class      | 67                             |



- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

## N7003

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 200W                           |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | Sliver                         |
| Main material | Die-casting Aluminium          |
| Luminous flux | 90lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ312*190mm                     |
| IP Class      | 67                             |



LED<sub>SMD</sub>  
HIGH-BAY SERIES

P07



- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

## N7004

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 150W                           |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | Black                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 90lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ304*140mm                     |
| IP Class      | 67                             |



- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

## N7005

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 200W                           |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | Black                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 90lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ404*140mm                     |
| IP Class      | 67                             |



P08

# ouen

ouen

## LED

### PANEL LIGHT

Led panel lights provide high performance,direct replacements for traditional,less efficient lights. They offer substantial savings on energy consumption and provide a superior light for any enviroment.




2016's **LED**  
PANEL LIGHT


# Elegancy series

## Key features

- Simple and classic design
- Advanced sinking type bottom cover
- to prevent leakage of light
- Hight lumen SMD chip with good performance

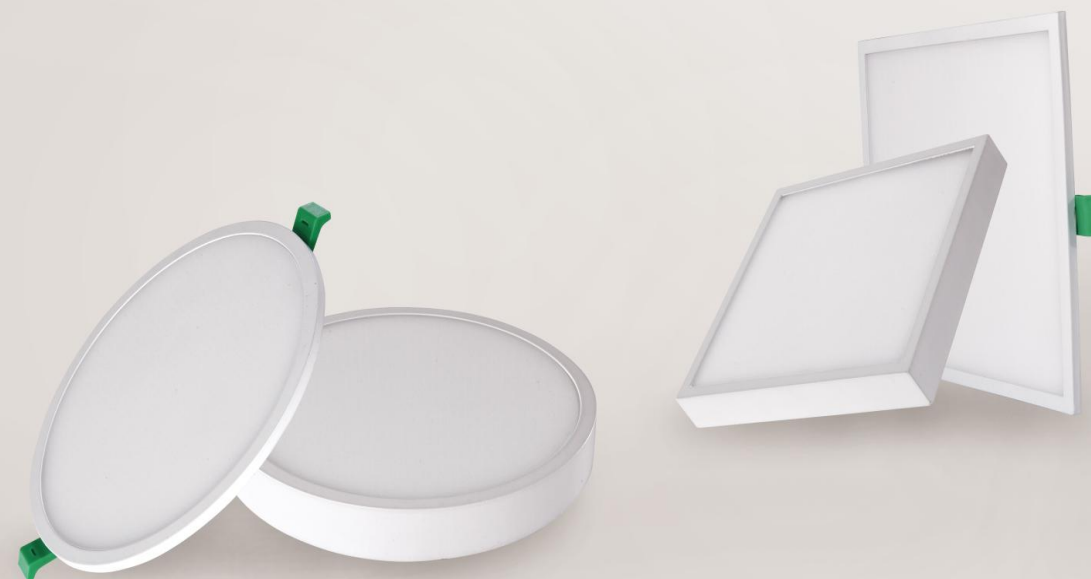

| Design                                                                                                                                                                                                                                                                     | Material                                                                                                                                                                                                                                                                     | Structure                                                                                                                                                                                                                                                                 | Chip                                                                                                                                                                                                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Simple&amp;Classic</p> <p>Classic simple design,with ultra slim body no matter recessed or surface mouted,which is the most suitable product for indoor general lighting area.</p> |  <p>ADC 12<br/>aluminium</p> <p>Eco-friendly top class aluminium for surface trim and heat sink with higher grade for heat dissipating and enhance the adhesion when powder coating</p> |  <p>A sinking bottom cover type is preventing the leakage of light to ensure high lumen output.Fitted with 3mm high efficiency LGP will help to achieve the greater performance.</p> |  <p>22-24<sub>lm</sub></p> <p>Config with high lumen SMD with 22-24lm/chip(optional 26-28lm/chip),which will guarantee high lumen output efficiency.</p> |

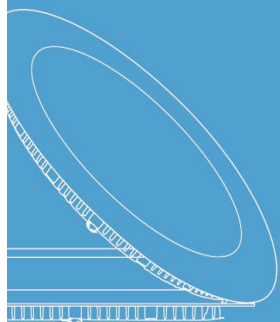



- Colour Rendering: 80+
- Cut Out:  $\Phi$ 100mm
- Accessories N/A
- Technical

- Colour Rendering: 80+
- Cut Out:  $\Phi$ 150mm
- Accessories N/A
- Technical

## N8005

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 9W                             |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi$ 118*22mm                |
| IP Class      | 20                             |



LED SMD  
PANEL LIGHT

P09



Panel Light Series

- Colour Rendering: 80+
- Cut Out:  $\Phi$ 170mm
- Accessories N/A
- Technical

- Colour Rendering: 80+
- Cut Out:  $\Phi$ 200mm
- Accessories N/A
- Technical

## N8007

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 22W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi$ 188*24mm                |
| IP Class      | 20                             |




## N8008

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 26W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | $\Phi$ 218*24mm                |
| IP Class      | 20                             |



P10



- Colour Rendering: 80+
- Cut Out:  $\Phi 100 \times 100 \text{mm}$
- Accessories N/A
- Technical

## N8015


### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 9W                             |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | 118*118*22mm                   |
| IP Class      | 20                             |



LED<sup>SMD</sup>  
PANEL LIGHT

P11

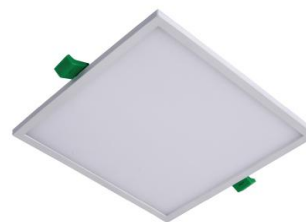

- Colour Rendering: 80+
- Cut Out:  $\Phi 170 \times 170 \text{mm}$
- Accessories N/A
- Technical

## N8017

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 22W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | 188*188*24mm                   |
| IP Class      | 20                             |



- Colour Rendering: 80+
- Cut Out:  $\Phi 200 \times 200 \text{mm}$
- Accessories N/A
- Technical

## N8018

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 26W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | 218*218*24mm                   |
| IP Class      | 20                             |



P12



- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

## N8025

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 9W                             |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ119.5*23mm                    |
| IP Class      | 20                             |



LED<sup>SMD</sup>  
PANEL LIGHT

P13



- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

## N8027

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 22W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ190*25mm                      |
| IP Class      | 20                             |



## N8028

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 26W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | Φ220*25mm                      |
| IP Class      | 20                             |



P14



- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

## N8035

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 9W                             |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | 119.5*119.5*23mm               |
| IP Class      | 20                             |



LED<sup>SMD</sup>  
PANEL LIGHT

P15



- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

- Colour Rendering: 80+
- Cut Out: Surface Mounted
- Accessories N/A
- Technical

## N8037

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 22W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | 190*190*25mm                   |
| IP Class      | 20                             |



## N8038

### GENERAL INFORMATION

|               |                                |
|---------------|--------------------------------|
| Power         | 26W                            |
| CCT           | 2700K/3000K/4000K/5000K/6000K* |
| Input         | AC220-240V 50/60Hz             |
| Body colour   | White                          |
| Main material | Die-casting Aluminium          |
| Luminous flux | 75lm/w                         |
| Dimmable      | triac/1-10v optional           |
| Size          | 220*220*25mm                   |
| IP Class      | 20                             |



P16

